

EVERGREEN

drive to the future

TYRE CATALOGUE

PASSENGER CAR SUV / 4x4 LIGHT TRUCK & VAN





CONTENTS

PRODUCT OVERVIEW	01
SUMMER TIRES	03
Passenger Car	
SUV/4x4	
Light Truck & Van	
ALL SEASON TIRES	27
WINTER TIRES	37
Passenger Car & Suv	
Van	
SPECIFICATIONS	47



PRODUCT OVERVIEW

SUMMER



Ultra High Performance



DYNACONTROL
EU728 **EU72**

High Performance



DYNACOMFORT *DYNACOMFORT* **EH23** **EH22**
EH226 **EH228**



Ultra High Performance



DYNACONTROL
E5880

Highway Terrain



DYNACOMFORT *DYNACOMFORT* **ES82**
E5380 **E583**



All Terrain



ES89 *DYNATERRAIN*
E592

Mud Terrain



DYN WILD
ES 91





DYNAMASTER **ES88**
EV516

ALL SEASON





DYNACOMFORT *DYNACOMFORT*
EA719 **EA721**





DYNAMASTER
EA720 VAN

WINTER





EW66 **EW62** *ICE TOUR*
15





WINTERPRO
EW616

SUMMER TYRES

EVERGREEN summer tyres release your driving passion.





PASSENGER CAR ULTRA HIGH PERFORMANCE



Designed for people who seek for ultimate driving experience. A perfect combination of excellent handling, outstanding comfort, the lowest-level noise and top-rated safety.



**DYNACONTROL
EU728**

EU72



The DynaControl EU728 is a high-performance tyre that delivers superior handling and traction, offering drivers a sportier ride and an enhanced driving experience. Crafted with advanced nano-reinforced materials, it delivers excellent handling and mobility on both dry and wet surfaces. Whether you're on winding mountain roads or cruising down the highway, the DynaControl EU728 will provide a smooth, comfortable, and safe ride every time.



V/W/Y Rated 30/35/40/45/50/55 Series

VERY HIGH SAFETY

The DynaControl EU728 is a high-performing tire that enhances vehicle safety with shorter braking distances, better lateral grip, and improved control compared to standard tyres.

Skid Protection

Cutting-edge contour and asymmetric pattern design effectively cut water film, improve wet braking performance, and provide excellent skid protection.



Breaking Performance

High-elastic rubber formula combined with nano-reinforced material shortens the braking distance. The sidewalls are narrower to create room for larger brakes.




HIGH-SPEED HANDLING

The importance of handling cannot be overstated when it comes to ensuring safety, vehicle stability, and an enjoyable driving experience. Tyres are instrumental in achieving proper handling, especially at high speeds.



Extra Support

The Frame Rigid-Balancing Technology prevents twisting of the carcass, thereby boosting the friction on the sides for better handling while turning.



Quick Response

Wider tyres with lower aspect ratios benefit handling performance and have more to do with wider contact patch shapes.

INNER & OUTER DUAL-PITCH

Outer Pitch

The optimized number of outer-pitch ensures steering grip in rough cornering while reducing noise from the tire tread.



Inner Pitch

The dual-pitch design secures space for improved water drainage by increasing the inner-pitch number, thereby further improving the tyre's anti-slip performance and braking performance in wet conditions.



PASSENGER CAR HIGH PERFORMANCE



Developed for passenger cars, provides marvelous performance and lower fuel consumption.



**DYNACOMFORT
EH226**

**DYNACOMFORT
EH228**

EH23

EH22

DYNACOMFORT EH226
High Performance



DynaComfort EH226 is a high-performance tyre that delivers exceptional traction and handling on both wet and dry surfaces. With lower rolling resistance and improved fuel efficiency, this tyre is both cost-effective and environmentally friendly.



T/H/V/W Rated
45/50/55/60/65/70 Series




ECONOMY AND COMFORT

DynaComfort EH226 is a tyre that provides a comfortable driving experience without sacrificing fuel efficiency. Featuring exceptional cornering stability and longer tread life, this tyre delivers outstanding value for drivers seeking a balance of comfort and economy.



Longer Tyre Life


EH226 is formulated with a special blend that improves its resistance to wear and tear. It is designed to increase the lifespan of the product and enhance its performance over time.

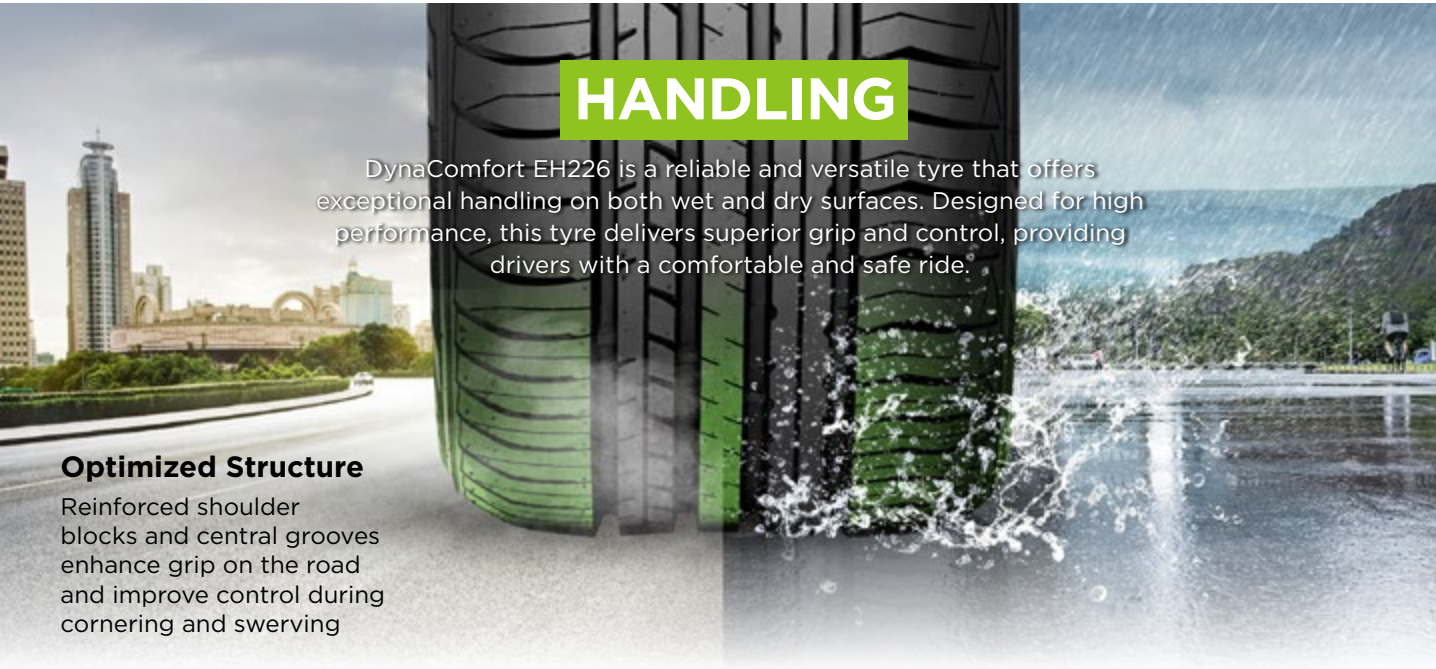

DynaComfort EH226 is a reliable and versatile tyre that offers exceptional handling on both wet and dry surfaces. Designed for high performance, this tyre delivers superior grip and control, providing drivers with a comfortable and safe ride.

Optimized Structure

Reinforced shoulder blocks and central grooves enhance grip on the road and improve control during cornering and swerving



Asymmetric Pattern Design

The unique asymmetric pattern design increases tyre rigidity and creates improved stability for steering and handling.




Traction

The high-density groove design efficiently cuts through the water film, combined with the contour design of CATR technology, effectively drains water.



Comfort

The streamlined pattern design is engineered for a smooth and comfortable ride, minimizing road noise, and remarkable high-speed stability.



Fuel Efficient

The utilization of a sidewall compound with high hardness helps to prevent deformation of the tyre, reduces the contact area with the ground, lowers rolling resistance, and results in improved fuel efficiency


DYNACOMFORT EH228
High Performance



The DynaComfort EH228 is an economical HP tyre with a pattern design focusing on wet grip and rolling resistance performance. It offers superior cost-effectiveness and excellent overall performance.



T/H/V/W Rated
55/60/65/70 Series



Reinforced Structure

The inner pattern is reinforced by ribs to strengthen the rubber, providing a better grip on the road and allowing for better control when cornering or swerving.


asymmetric pattern design

The unique asymmetric pattern design increases tire rigidity and creates improved stability for steering and handling.



WET GRIP

EH228 provides a reliable grip on slippery surfaces and can handle different wet conditions with ease. It guarantees a secure grip on wet surfaces, providing you with total confidence and worry-free performance.



Drainage

The high-density groove design efficiently cuts through the water film, combined with the contour design of CATR technology, effectively drains water.



Silica-Rich Formula


This product is a unique high-wet slip performance formula that is specifically engineered for maximum wet performance.

COMFORT AND ECONOMY

The DynaComfort EH228 is designed for drivers who need a balance of comfort and economy. It offers a smooth ride, excellent cornering stability, and a longer tread life for added value.

Longer Tread Life

The edge chamfering design of the pattern block can effectively wrap the road surface and reduce irregular wear to extend wear life.



Fuel Efficient

Optimized product design, with high-performance rubber formula, smaller rolling resistance, extraordinary energy-saving physical examination, and outstanding cost performance.



Driving Comfort

Optimized pitch arrangement and pattern design effectively reduce noise and improve driving comfort.



SUV / 4X4

ULTRA HIGH PERFORMANCE



Premium performance tyre for luxury SUV /4X4s and pickups, enhances high-speed handling and provides great traction on wet and dry roads.



DYNACONTROL
E5880

DYNACONTROL ES880

Ultra High Performance



The DynaControl ES880 is designed to focus on superior handling and traction for a sportier feel and an enhanced driving experience. This ultra-high-performance tyre is suitable for those looking for maximum grip and handling for 4X4 and SUVs.



V/W/Y Rated
35/40/45/50/55 Series

OPTIMUM GRIP IN ALL DRIVING SITUATIONS

High levels of grip improve acceleration, braking, and overall handling—the car's responsiveness to driver input. A car with good handling allows the driver to respond to situations with minimal effort.



Anti-Slip Protection

Wide tread grooves ensure drainage and grip, which provide excellent anti-slip protection.



Turning Control

Stiff sidewalls prevent deformation under braking and cornering. This helps maintain the width of the contact patch.




HIGH-SPEED HANDLING

Handling is crucial when it comes to safety, vehicle stability, and driving pleasure. Tyres play an important role in vehicle handling, especially when driving at high speeds.

Quick Response

Wider tyres with lower aspect ratios benefit handling performance and have more to do with wider contact patch shapes.

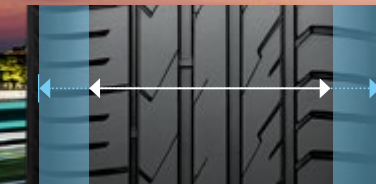

Extra Support

High-density rayon and polyester carcass provide extra support at high speeds.

Stability

The asymmetrical tread pattern and compact shoulder design provide excellent handling stability, especially at high speeds or when cornering



VERY HIGH SAFETY

The DynaControl ES880 is designed to improve your safety in your vehicle, it features high performance that provides the shortest braking distances at high speeds, greater lateral grip, and more intuitive control than standard tyres.



Maximum Contact

The sidewalls are narrower to create room for larger brakes.

Braking Performance

The wider tread ensures high-speed safety and maximum contact with the road.





SUV / 4X4 HIGHWAY TERRAIN



Premium highway terrain tyre designed for SUV /4X4s and pickups, provides excellent handling and stability on dry and wet road conditions.



DYNACOMFORT
ES380

DYNACOMFORT
ES83

ES82

DynaComfort ES380

Highway Terrain



The DynaComfort ES380 is designed to offer a safer and more comfortable ride. With innovative anti-resistant formula and unique tread pattern, ES380 provides exceptional wet grip, reduced braking distance, and longer mileage.



H Rated
65/70 Series



Robust Durability

Enhanced carcass structure provides a flatter tread contour for on-road stability and durability.




Exceptional Tread Life

ES380 utilizes carbon black particles to enhance the skid resistance and wear resistance of tires, resulting in a longer lifespan and increased mileage.




Wet & Dry Handling

An innovative open-shoulder design enhances its stability and traction, especially when navigating sharp turns on roads that are either wet or dry.



Ultra Wet Traction

The wide main grooves and masses of small grooves incorporated into the design help to increase wet traction, ensuring a safe driving experience.




Skid Protection

Widened tread groove design improves water drainage, improves wet braking performance, and provides superior protection against skidding.



This DynaComfort ES380 is designed to minimize noise levels and offer a smooth and comfortable ride, making it an ideal choice for long-distance journeys.



Quiet Driving

The optimized pattern design with wider grooves and center ribs offers a smooth driving experience on both paved and unpaved roads.



SUV / 4X4

ALL TERRAIN / MUD TERRAIN



All terrain tyre for SUV/4x4s, pickups and light trucks, provides excellent performance on urban and off-road conditions.



**DYNA TERRAIN
ES92**

ES89

**DYNA WILD
ES 91**

DYNA TERRAIN ES92

All Terrain



The Dyna Terrain ES92 is designed to provide excellent highway performance and limited off-road capability. With the durability to conquer mud, gravel, and grass, this tyre features advanced technology that provides better traction and durability, better grip on wet roads, and quieter road noise.




M+S
S/T/H/V Rated
60/65/70 Series

HANDLING

Handling is crucial when it comes to safety, vehicle stability, and driving pleasure. Tyres play an important role in vehicle handling.



Wider contact patch
When driving on wet roads wider contact patch shapes benefit handling.



W-shaped grooves
W-shaped grooves deliver enhanced breaking and reinforce handling in off-road conditions.



Tougher Sidewalls
Increased rubber thickness provides extra support and provides better driving performance.

OPTIMUM GRIP IN ALL DRIVING SITUATIONS

With aggressive All-Terrain pattern design, we can make the tire's drainage performance and grip performance reach a higher level. Taking the safety of dry and wet road conditions into account. Providing traction to get where you want to go with confidence.



Interlocking tie-bar
Interlocking tie-bar maximizes traction and handling on-and off-road by stabilizing the tread center.

Wet Traction

Open shoulder design improves stability and traction performance in a variety of road conditions.




SAFETY WITH COMFORT

The ES92 is designed to provide increased mud and rock traction to improve your safety in your vehicle. Simultaneously provides a comfortable and quiet driving experience



Safety
Sophisticated bruise-resistant sidewall rubber formula provides longer service life



Comfort
Multipath tread design helps reduce noise for a quite ride on either paved or unpaved roads.





ALL SEASON TYRES

EVERGREEN all-season tyres maximize year-round performance during all weather conditions.



ALL SEASON



Scientifically designed for passenger cars, SUVs, and commercial vehicles, provides excellent driving performance in all-season conditions.



DYNACOMFORT
EA719

DYNACOMFORT
EA721

DYNAMASTER
EA720^{VAN}

DynaComfort EA719

All Season



The DynaComfort EA719 is engineered with a directional tread pattern and all-season compound to deliver optimal handling, extended tyre lifespan, precise cornering, and superior grip across diverse weather conditions.



T/H/V/W Rated
45/50/55/60/65/70/80 Series

Optimum Grip

The directional tread pattern is designed to handle wet and icy conditions. Its ability to efficiently evacuate water enables excellent traction and improved steering response.



All Season Driving

The EA719 is designed to offer year-round driving comfort and convenience. The new tread compound design is suitable for all-season climates, ensuring travel safety regardless of the weather outside.



Economic Driving

Improved driving safety and longer tread life are achieved through the inclusion of central longitudinal ribs and strengthened shoulders.

Economic Driving

The latest tread compound offers greater wear resistance, resulting in extended mileage.

EXCELLENT BRAKING

The tread tip pattern enhances traction and reduces braking distance for driving in all seasons, including snowy and icy conditions.

The 3PMSF marking ensures adherence to local regulations for optimal usage in both summer and winter seasons.



DYNACOMFORT EA721

All Season



The EA721 designed to perform in every climate condition, with excellent wet and dry braking performance. Developed using advanced materials and production methods, the EA721 is designed to enhance handling and grip while providing excellent treadwear.



T/H Rated
50/55/65 Series

OPTIMUM GRIP IN ALL DRIVING SITUATIONS

Through the scientific design of the lateral pattern, we can make the tyre's drainage performance and grip performance reach a higher level. Taking the safety of dry and wet road conditions into account.



Drainage Grooves
The wide and V-shaped grooves improve water drainage.



The notches distributed around the grooves can pierce the water film and improve the grip performance.

ALL-SEASON SAFETY

The EA721 is designed to improve your safety in your vehicle, it features safety in all weather conditions, so you no longer need to worry about the seasonal tyre change.



3PMSF marking guarantees perfect summer and winter usability in compliance with local regulations.



Special tread design with central zig-zag grooves improves safety, including in wet conditions.

The advanced 3D-sipe technology provides excellent performance on snow surfaces.




ALL-SEASON HANDLING

Handling is crucial when it comes to safety, vehicle stability, and driving pleasure. Tyres play an important role in vehicle handling.



High-Density Carcass
High-density rayon and polyester carcass provide extra support and provide better driving performance on dry roads.



Tie-Bar
Well-designed tie-bar increases block stiffness, resulting in improved handling performance.

DynaMaster

EA720^{VAN}

All Season




The DynaMaster EA720^{VAN} is a high-quality tyre designed for light trucks and vans, providing long-lasting performance in all weather conditions throughout the year. Its durability and reliability make it ideal for commercial use, ensuring smooth and safe driving for extended periods.



T/H Rated
60/65/70/75 Series


ALL SEASON DRIVING

Wave-shaped sipes improve handling on dry road conditions, reducing the braking distance. Multiple sipes technology provides outstanding braking and traction performance on ice and snow.



Lower Rolling Resistance

EA720 features an innovative construction that includes a coupling element that helps reduce friction heat, ultimately improving the overall performance and longevity of the tire.



Extended mileage

The improved carcass structure and optimized pressure distribution provide extended mileage, ultimately reducing ownership costs.



Safe Driving

Improved tread pattern with silica compound increases driving safety in dry and wet conditions.

Excellent Handling

The EA720 boasts impressive handling and braking capabilities on dry roads, making it a reliable option for drivers looking for year-round performance.

EXCELLENT BREAKING

Wave-shaped sipes improve handling on dry road conditions, reducing the braking distance. Multiple sipes technology provides outstanding braking and traction performance on ice and snow.



Optimized Tread Design

The unique tread design features central zig-zag grooves that improved stability on wet roads and prevent slipping or skidding.

Advanced Sipping Technology

Improved performance in both dry and wet conditions, achieved through the advanced sipping technology. The sipes provide grip and stability for the tread, resulting in a safer and more reliable driving experience.

A scenic winter landscape featuring a snow-covered mountain road that curves through a village. The houses in the background have snow-laden roofs, and evergreen trees are scattered throughout the scene. The foreground shows a blurred road with yellow lane markings, suggesting motion.

WINTER TYRES

EVERGREEN winter tyres guard
your winter driving.



WINTER



Specially designed for passenger cars and SUV /4x4s, provides high level handling and safety in winter conditions.



EW66

EW62

***ICE TOUR
i5***

***WINTERPRO
EW616***

EW66

Winter



The EW66 tyre is the perfect companion for drivers who frequently navigate through snowy and icy terrains. Its silica compound ensures superior driving performance, while an asymmetric pattern and wide tread offer unmatched safety.



S/T/H/V Rated
35/40/45/50/55/60/65 Series

ULTRA WINTER TRACTION

Specialized winter tread design maintains softness in low temperatures and ensures stable driving and braking forces.



White Carbon Black Filler



Carbon Black Filler

Advanced Silica Compound Technology improves tire grip and offers lower rolling resistance for more efficient tread wear.



WINTER BRAKING

The presence of deep and sophisticatedly arranged grooves, along with steel sheets, aids in cushioning the tread and reducing the braking distance on icy surfaces.



Safety and Beyond

M+S (Mud + Snow) marked tyres and Three-Peak Mountain Snowflake (3PMSF) tyres deliver winter performance that is legally certified. The EW66 will help to ensure your safety, and the safety of those around you, during the winter months.



EXCELLENT HANDLING

Good handling means it can be easily steered, turned, and stopped with minimal effort from the driver.

The asymmetric pattern design provides super maneuverability and allows for greater control and precision in driving.

Advanced Sipping Technology

Enhances the winter driving experience by improving grip and traction on packed snow and ice through 3D sipping.

The advanced sipping technology makes acceleration and braking more effective in winter weather conditions.



IceTour i5

Winter Studdable



The IceTour i5 winter tyre provides excellent traction and stability on slippery roads during winter, while also having a strong structure and long-lasting durability perfect for harsh winter conditions.



T/H/S/Q/R Rated
40/45/50/55/60/65/70/75/80 Series

Studdable Tread Design

The studdable tread design is specially designed to provide better grip and traction on slippery roads and improve driving safety and braking performance during harsh winter weather conditions, helping drivers to avoid accidents caused by skidding or sliding.



Ultra Winter Traction

Studded-line and pins arrayed randomly contribute to the high grip force and improve resistance to sideslip on snow & ice ground.

V-Shaped Tread
Provides improved traction on icy and snowy roads, as well as greater resistance to skidding.

Wide Zig-Zag Grooves
Contributes to great braking performance on snowy and icy surfaces while also effectively draining water.

Silica Compound
Reduces rolling resistance, carbon emission, and fuel consumption.

Safety and Beyond

M+S (Mud + Snow) marked tires and Three-Peak Mountain Snowflake (3PMSF) tyres deliver winter performance that is legally certified. With the IceTour i5, you can enjoy the winter season without worrying.



WINTERPRO EW616

Winter



The WinterPRO EW616 is a winter tyre designed to provide superior performance in harsh winter conditions. Its advanced pattern and durable carcass design make it capable of handling even the toughest winter weather. Whether you're driving through snow or ice, this tyre is built to keep you safe on the road.




R/S/T Rated
60/65/70/75 Series




Winter Grip

EW616 features a specialized tread formula with an advanced sipes design that improves grip while also reducing fuel consumption.

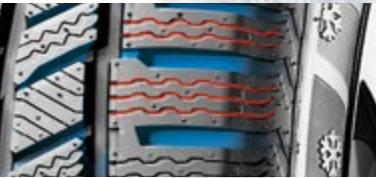


Braking

The intersecting blocks, grooves, and sipes allow for improved control and braking when driving on ice, making it safer and more reliable.

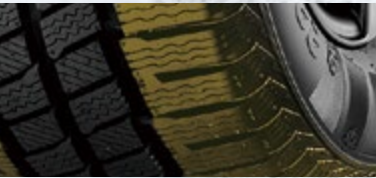


Winter Handling

The circumferential winding pattern grooves are designed to offer superior grip and control when driving in snowy and wet conditions. These grooves help to drain out water and snow effectively, preventing skidding and slipping on cold and slippery roads.

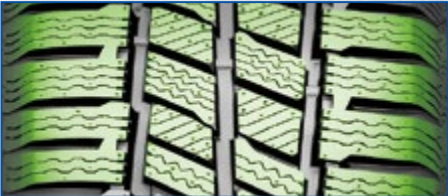

Specialized tread formula compounds is designed to maintain the elasticity and softness of tyres in harsh, cold weather conditions.

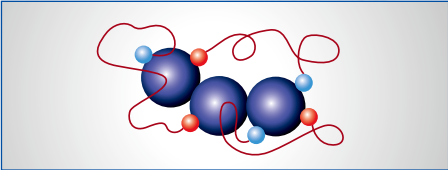

Long Mileage Driving

Improved performance and life of tyres using specific compounds in the tread formula. It helps to resist hydroplaning on wet roads, reduce rolling resistance and increase mileage.



SUMMER TYRES

Ultra High Performance



DYNACONTROL
EU728



V/W/Y Rated
30/35/40/45/50/55 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
16"	205/50ZR16	87	W		8.2	6½J	214	612	300	BSW	D	C	71dB	B Y
	205/55R16	91	V		8.2	6½J	214	632	300	BSW	D	C	71dB	B Y
	205/55ZR16	94	W	XL	8.2	6½J	214	632	340	BSW	D	C	71dB	B Y
	205/55ZR16	91	W		8.2	6½J	214	632	340	BSW	D	C	71dB	B Y
	215/45ZR16	90	Y	XL	8.2	7J	213	600	340	BSW	D	C	71dB	B Y
	215/55ZR16	93	W		8.2	7J	226	642	300	BSW	D	C	71dB	B Y
	215/55ZR16	97	W	XL	8.2	7J	226	642	300	BSW	D	C	71dB	B Y
17"	205/50ZR17	93	W	XL	8.2	6½J	214	638	340	BSW	D	C	71dB	B Y
	205/55R17	95	V	XL	8.2	6½J	214	658	340	BSW	D	C	71dB	B Y
	215/50ZR17	95	W	XL	8.2	7J	226	648	340	BSW	D	C	71dB	B Y
	225/45ZR17	94	Y	XL	8.2	7½J	225	634	340	BSW	D	C	71dB	B Y
	225/50ZR17	98	W	XL	8.2	7J	233	658	340	BSW	D	C	71dB	B Y
	235/50ZR17	100	W	XL	8.2	7½J	245	668	340	BSW	D	C	71dB	B Y
	245/40ZR17	95	Y	XL	8.2	8½J	248	628	340	BSW	D	C	71dB	B Y
	255/40ZR17	98	W	XL	8.2	9J	260	636	340	BSW	D	C	71dB	B Y
18"	255/45ZR17	102	W	XL	8.2	8½J	255	662	340	BSW	D	C	71dB	B Y
	215/40ZR18	89	Y	XL	8.2	7½J	218	629	340	BSW	D	C	71dB	B Y
	215/45ZR18	93	Y	XL	8.2	7J	213	651	340	BSW	D	C	71dB	B Y
	225/40ZR18	92	Y	XL	8.2	8J	230	637	340	BSW	D	C	71dB	B Y
	235/45ZR18	98	Y	XL	8.2	8J	236	669	340	BSW	D	C	71dB	B Y
	245/40ZR18	97	Y	XL	8.2	8½J	248	653	340	BSW	D	C	71dB	B Y
	255/35ZR18	94	Y	XL	8.2	9J	260	635	340	BSW	D	C	71dB	B Y
	265/35ZR18	97	Y	XL	8.2	9½J	271	643	340	BSW	D	C	71dB	B Y
19"	225/35ZR19	88	Y	XL	8.2	8J	230	641	340	BSW	D	C	71dB	B Y
	235/40ZR19	96	Y	XL	8.2	8½J	241	671	340	BSW	D	C	71dB	B Y
	245/40ZR19	98	Y	XL	8.2	8½J	248	679	340	BSW	D	C	71dB	B Y
	255/35ZR19	96	Y	XL	8.2	9J	260	661	340	BSW	D	C	71dB	B Y
	265/30ZR19	93	Y	XL	8.2	9½J	271	643	340	BSW	D	C	71dB	B Y
	275/30ZR19	96	Y	XL	8.2	9½J	278	649	340	BSW	D	C	71dB	B Y
20"	245/35ZR20	95	W	XL	8.2	8½J	248	680	340	BSW	D	C	71dB	B Y
	245/40ZR20	99	W	XL	8.2	8½J	248	704	340	BSW	D	C	71dB	B Y
	255/35ZR20	97	Y	XL	8.2	9J	260	686	340	BSW	D	C	71dB	B Y

EU72



W/Y Rated
35/40/45/50/55 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
16"	205/45ZR16	83	W		8	7J	206	590	300	BSW	D	B	71dB	B Y
	205/45ZR16	87	W	XL	8	7J	206	590	300	BSW	D	B	71dB	B Y
	205/50ZR16	87	W		8.2	6½J	214	612	300	BSW	D	B	71dB	B Y
	205/55ZR16	91	W		8.2	6½J	214	632	300	BSW	D	B	71dB	B Y
	205/55ZR16	94	W	XL	8.2	6½J	214	632	300	BSW	D	B	71dB	B Y
	215/55ZR16	93	W		8.2	7J	226	642	300	BSW	D	B	71dB	B Y
	215/55ZR16	97	W	XL	8.2	7J	226	642	300	BSW	D	B	71dB	B Y
17"	225/55ZR16	95	W		8.2	7J	233	654	300	BSW	D	B	71dB	B Y
	225/55ZR16	99	W	XL	8.2	7J	233	654	300	BSW	D	B	71dB	B Y
	205/40ZR17	84	W	XL	8.2	7½J	212	596	340	BSW	D	B	72dB	B Y
	205/45ZR17	88	W	XL	8	7J	206	616	340	BSW	D	B	72dB	B Y
	205/50ZR17	93	W	XL	8.2	6½J	214	638	340	BSW	D	B	72dB	B Y
	215/40ZR17	87	W	XL	8	7½J	218	604	340	BSW	D	B	72dB	B Y
	215/45ZR17	91	W	XL	8.2	7J	213	626	340	BSW	D	B	72dB	B Y
	215/50ZR17	95	W	XL	8.2	7J	226	648	340	BSW	D	B	72dB	B Y
18"	225/45ZR17	94	W	XL	8.2	7½J	225	634	340	BSW	D	B	72dB	B Y
	225/50ZR17	98	W	XL	8.2	7J	233	658	340	BSW	D	B	72dB	B Y
	225/55ZR17	97	W		8.2	7J	233	680	300	BSW	D	B	71dB	B Y
	235/45ZR17	97	W	XL	8.2	8J	236	644	340	BSW	D	B	72dB	B Y
	245/45ZR17	99	W	XL	8.2	8J	243	652	340	BSW	D	B	72dB	B Y
	215/35ZR18	84	W	XL	8	7½J	218	607	340	BSW	D	B	72dB	B Y
	225/40ZR18	92	W	XL	8.2	8J	230	637	340	BSW	D	B	72dB	B Y
	225/45ZR18	95	W	XL	8.2	7½J	225	659	340	BSW	D	B	72dB	B Y
19"	235/40ZR18	95	W	XL	8.2	8½J	241	645	340	BSW	D	B	71dB	B Y
	235/50ZR18	101	W	XL	8.2	7½J	245	693	340	BSW	D	B	72dB	B Y
	245/45ZR18	100	W	XL	8	8J	243	677	340	BSW	D	B	72dB	B Y
	235/35ZR19	91	Y	XL	8.2	8½J	241	647	340	BSW	D	B	72dB	B Y
	235/45ZR19	99	W	XL	8	8J	236	695	340	BSW	D	B	72dB	B Y
	245/35ZR19	93	Y	XL	8.2	8½J	248	655	340	BSW	D	B	72dB	B Y
19"	255/50ZR19	107	Y	XL	8	8J	265	739	340	BSW	C	B	72dB	B Y

SUMMER TYRES

High Performance



DYNACOMFORT
EH226



T/H/V/W Rated
45/50/55/60/65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
13"	155/70R13	75	T		8	4.50B	157	548	300	BSW	D	C	68dB	B
	165/65R13	77	T		8	5.00B	170	544	300	BSW	D	C	68dB	B
	175/60R13	77	H		8	5.00B	177	540	300	BSW	D	C	68dB	B
	175/70R13	82	T		8	5.00B	177	576	300	BSW	D	C	68dB	B
14"	155/65R14	79	T	XL	8	4½J	157	558	340	BSW	D	C	68dB	A
	165/60R14	75	H		8	5J	170	554	300	BSW	D	C	68dB	B
	165/70R14	81	T		8	5J	170	588	300	BSW	D	C	68dB	B
	165/70R14	85	T	XL	8	5J	170	588	300	BSW	D	C	68dB	B
	175/65R14	82	T		8	5J	177	584	300	BSW	D	C	68dB	B
	175/65R14	86	T	XL	8	5J	177	584	300	BSW	D	C	68dB	B
	175/70R14	88	T	XL	8	5J	177	602	340	BSW	D	C	68dB	B
	185/60R14	82	H		8	5½J	189	578	300	BSW	D	C	68dB	B
	185/65R14	86	H		8	5½J	189	596	300	BSW	D	C	68dB	B
	185/70R14	88	H		8	5½J	189	616	300	BSW	D	C	68dB	B
15"	205/60R14	88	H		8	6J	209	602	300	BSW	D	C	68dB	A
	155/60R15	74	H		8	4½J	157	567	300	BSW	D	C	68dB	B
	165/65R15	81	T		8	5J	170	595	300	BSW	D	C	68dB	B
	175/60R15	81	V		8	5J	177	591	300	BSW	D	C	68dB	B
	175/65R15	84	H		8	5J	177	609	300	BSW	D	C	68dB	B
	185/55R15	82	V		8	6J	194	585	300	BSW	D	C	68dB	B Y
	185/60R15	84	H		8	5½J	189	603	300	BSW	D	C	68dB	B Y
	185/60R15	88	H	XL	8	5½J	189	603	300	BSW	D	C	68dB	B Y
	185/65R15	88	H		8	5½J	189	621	300	BSW	D	C	68dB	B Y
	195/50R15	82	V		8	6J	201	577	300	BSW	D	C	68dB	A Y
	195/55R15	85	V		8	6J	201	595	300	BSW	D	C	68dB	A Y
	195/60R15	88	V		8.4	6J	201	615	300	BSW	D	C	68dB	A Y
	195/65R15	91	H		8	6J	201	635	300	BSW	D	C	68dB	A Y
	195/65R15	91	V		8	6J	201	635	300	BSW	D	C	68dB	A Y
16"	205/55ZR15	88	W		7.7	6½J	214	607	300	BSW	D	C	68dB	A
	205/65R15	94	V		8	6J	209	647	300	BSW	D	C	68dB	A Y
	185/50R16	81	V		8	6J	194	592	300	BSW	D	C	68dB	B Y
	185/55R16	87	V	XL	8	6J	194	610	340	BSW	D	C	68dB	A Y
	195/45ZR16	84	W	XL	8	6½J	195	582	340	BSW	D	C	68dB	A Y
	195/50R16	88	V	XL	8	6J	201	602	340	BSW	D	C	68dB	A Y
	195/55R16	91	V	XL	8	6J	201	620	300	BSW	D	C	68dB	A Y
	195/55R16	87	V		8	6J	201	620	300	BSW	D	C	68dB	A Y
	205/55R16	94	V	XL	8	6½J	214	632	340	BSW	D	C	68dB	A Y
	205/60R16	92	V		8	6J	209	652	300	BSW	D	C	68dB	A Y
16"	205/65R16	95	H		8	6J	209	672	300	BSW	D	C	68dB	A Y

DYNACOMFORT
EH228



T/H/V/W Rated
55/60/65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
14"	175/65R14	86	T	XL	7	5J	175	584	340	BSW	C	D	70dB	B
	175/70R14	88	T	XL	7	5J	175	602	340	BSW	C	D	70dB	B
15"	185/65R15	88	H		7	5½J	185	621	300	BSW	C	D	70dB	B
	195/65R15	91	V		7	6J	195	635	300	BSW	C	D	71dB	B
	205/65R15	94	V		7	6J	205	647	300	BSW	C	D	71dB	B
16"	205/55R16	94	W	XL	7	6½J	205	632	340	BSW	B	D	72dB	B
	205/60R16	92	V		7	6J	205	652	300	BSW	C	D	71dB	B
	215/60R16	99	V	XL	7	6½J	215	664	340	BSW	B	D	72dB	B

EH22



T/H/V Rated
60/65/70/80 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
12"	155/70R12	73	T		7.0	4.50B	157	523	300	BSW	D	B	70dB	B
	155/65R13	73	T		7.6	4.50B	157	532	300	BSW	D	B	70dB	B
	155/80R13	79	T		8	4.50B	157	578	300	BSW	D	B	70dB	B
	165/65R13	77	T		7.6	5.00B	170	544	300	BSW	D	B	70dB	B
13"	165/70R13	79	T		7.5	5.00B	170	562	340	BSW	D	B	70dB	B
	165/70R13	83	T	XL	7.5	5.00B	170	562	340	BSW	D	B	70dB	B
	165/80R13	83	T		8	4.50B	165	594	300	BSW	D	B	70dB	B
	175/70R13	82	T		8	5.00B	177	576	300	BSW	D	B	70dB	B
	185/60R13	80	T		7.6	5.50B	189	552	300	BSW	D	B	70dB	B
	185/70R13	86	T		7.8	5.50B	189	590	300	BSW	D	B	70dB	B
	165/60R14	75	H		7.6	5J	170	554	300	BSW	D	B	70dB	B
	175/65R14	82	T		8	5J	177	584	340	BSW	D	B	70dB	B
14"	175/65R14	86	T	XL	8	5J	177	584	340	BSW	D	B	70dB	B
	175/70R14	84	T		8	5J	177	602	340	BSW	D	B	70dB	B
	175/70R14	88	T	XL	8	5J	177	602	340	BSW	D	B	70dB	B
	185/70R14	88	H		8	5½J	189	616	300	BSW	D	B	70dB	B
	195/70R14	91	T		8.4	6J	201	630	300	BSW	D	B	71dB	B
	205/70R14	98	T	XL	8.5	6J	209	644	340	BSW	D	B	72dB	B
15"	205/70R15	96	T		8.5	6J	209	669	300	BSW	D	B	71dB	B
16"	215/60R16	95	V		8.8	6½J	221	664	300	BSW	D	B	71dB	B

SUMMER TYRES

High Performance



EH23



T/H/V/W Rated
50/55/60/65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
14"	165/65R14	79	T		7.6	5J	170	570	300	BSW	D	C	70dB	B
	175/60R14	79	H		8	5J	177	566	300	BSW	D	C	70dB	B
	175/65R14	82	T		8	5J	177	584	300	BSW	D	C	70dB	B
	175/65R14	86	T	XL	8	5J	177	584	300	BSW	D	C	70dB	B
	185/50R14	77	V		8	6J	194	542	300	BSW	D	C	70dB	B
	185/55R14	80	V		8.0	6J	194	560	300	BSW	D	C	70dB	B
	185/60R14	82	H		8.4	5½J	189	578	300	BSW	D	C	70dB	B
	185/65R14	86	H		8	5½J	189	596	300	BSW	D	C	70dB	B
	195/60R14	86	H		8.4	6J	201	590	300	BSW	D	C	70dB	B
15"	175/55R15	77	T		7.8	5½J	182	573	300	BSW	D	C	70dB	B
	175/65R15	84	H		8	5J	177	609	300	BSW	D	C	70dB	B
	185/55R15	82	V		8	6J	194	585	300	BSW	D	C	70dB	B
	185/60R15	84	H		8	5½J	189	603	300	BSW	D	C	70dB	B
	185/60R15	88	H	XL	8	5½J	189	603	300	BSW	D	C	70dB	B
	185/65R15	88	H		8	5½J	189	621	300	BSW	D	C	70dB	B
	185/65R15	92	H	XL	8	5½J	189	621	300	BSW	D	C	70dB	B
	195/50R15	82	V		8	6J	201	577	300	BSW	D	C	70dB	B
	195/55R15	85	V		8	6J	201	595	300	BSW	D	C	70dB	B
	195/60R15	88	V		8.4	6J	201	615	300	BSW	D	C	70dB	B
	195/65R15	91	H		8	6J	201	635	300	BSW	D	C	70dB	B
	195/65R15	91	V		8	6J	201	635	300	BSW	D	C	70dB	B
	195/65R15	95	T	XL	8	6J	201	635	300	BSW	D	C	70dB	B
	205/50R15	86	V		8	6½J	214	587	300	BSW	D	B	71dB	B Y
	205/60R15	95	H	XL	8.5	6J	209	627	300	BSW	D	B	70dB	B
16"	205/65R15	94	V		8.5	6J	209	647	300	BSW	D	B	70dB	B
	215/60R15	98	V	XL	8.5	6½J	221	639	340	BSW	D	C	71dB	B
	215/65R15	96	V		8.8	6½J	221	661	300	BSW	D	C	71dB	B
	215/70R15	98	H		8.5	6½J	221	683	300	BSW	D	C	71dB	B
	195/50R16	88	V	XL	8	6J	201	602	340	BSW	D	C	72dB	B
	195/55R16	87	V		8	6J	201	620	300	BSW	D	C	70dB	B
	195/55R16	91	V	XL	8	6J	201	620	300	BSW	D	C	70dB	B
	195/60R16	89	V		8.4	6J	201	640	300	BSW	D	C	70dB	B
	205/55R16	91	V		8	6½J	214	632	300	BSW	D	B	70dB	B Y
17"	205/55R16	91	W		8	6½J	214	632	300	BSW	D	B	70dB	B Y
	205/55R16	94	V	XL	8	6½J	214	632	300	BSW	D	B	70dB	B Y
	205/60R16	92	V		8.2	6J	209	652	300	BSW	D	B	70dB	B
	215/60R16	95	V		8.8	6½J	221	664	300	BSW	D	C	71dB	B
	215/65R16	98	H		8.8	6½J	221	686	300	BSW	D	C	71dB	B
	215/55R17	94	V		8.2	7J	226	668	300	BSW	D	C	71dB	B Y
	215/55R17	98	V	XL	8.2	7J	226	668	300	BSW	D	C	71dB	B Y

Ultra High Performance



DYNACONTROL
E5880



V/W/Y Rated
35/40/45/50/55 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
18"	215/55R18	99	W	XL	7.8	7J	226	693	340	BSW	C	B	72dB	B Y
	225/55R18	102	V	XL	8	7J	233	705	340	BSW	C	B	72dB	B Y
	235/55R18	104	V	XL	8	7½J	245	715	340	BSW	C	B	72dB	B Y
19"	225/45ZR19	96	W	XL	7.8	7½J	225	685	340	BSW	D	B	72dB	B
	225/55R19	99	V		7.8	7J	233	731	300	BSW	C	B	71dB	B
	245/45ZR19	102	Y		7.8	8J	243	703	340	BSW	C	B	72dB	B
20"	275/35ZR19	96	Y		7.8	9½J	278	675	300	BSW	D	B	72dB	B
	265/50R20	111	V	XL	8	8½J	277	774	340	BSW	C	B	72dB	B Y
	275/35R20	102	Y	XL	8	9½J	278	700	340	BSW	C	B	72dB	B
	275/40R20	106	Y	XL	8	9½J	278	728	340	BSW	C	B	72dB	B Y
21"	315/35R20	110	Y	XL	7.8	11J	320	728	340	BSW	C	B	72dB	B Y
	295/35ZR21	107	Y	XL	7.8	10½J	301	739	340	BSW	C	B	72dB	A

SUMMER TYRES

Highway Terrain



DYNACOMFORT
E583



H/V/Y Rated
50/55/60/65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
15"	205/70R15	96	H		11	6J	209	669	300	BSW	D	C	71dB	B
	215/65R16	102	H	XL	8.8	6½J	221	686	340	BSW	C	C	71dB	B
16"	215/70R16	100	H		9.0	6½J	221	708	300	BSW	D	C	71dB	B
	235/60R16	100	H		8	7J	240	688	300	BSW	C	C	71dB	B
	235/70R16	106	H		9.0	7J	240	736	300	BSW	C	C	71dB	B
17"	215/60R17	96	H		8.8	6½J	221	690	300	BSW	D	C	71dB	B
	225/60R17	99	H		9.5	6½J	228	702	300	BSW	D	C	71dB	B
	225/65R17	102	H		8.2	6½J	228	724	300	BSW	C	C	71dB	B
	235/55R17	99	V		7.8	7½J	245	690	340	BSW	C	C	71dB	B
	235/65R17	108	H	XL	9.0	7J	240	738	340	BSW	C	C	72dB	B
	225/55R18	98	V		8	7J	233	705	340	BSW	C	C	71dB	B
18"	235/55R18	100	V		9.5	7½J	245	715	340	BSW	C	C	71dB	B
	235/60R18	103	V		9.0	7J	240	739	300	BSW	D	C	71dB	B
	255/55R18	109	Y	XL	9.5	8J	265	737	340	BSW	C	C	71dB	B
19"	255/50R19	107	V	XL	9.0	8J	265	739	340	BSW	C	C	71dB	B

ES82



H/S/T Rated
60/65/70/75 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
15"	215/75R15	100	S		9.5	6J	216	703	300	BSW	D	C	71dB	B
	225/75R15	102	T		9.5	6J	223	719	300	BSW	D	C	71dB	B
	235/75R15	105	S		9.5	6½J	235	733	300	BSW	D	C	71dB	B
	215/65R16	98	T		9.0	6½J	221	686	300	BSW	D	C	71dB	B
16"	215/70R16	100	T		9.0	6½J	221	708	300	BSW	D	C	71dB	B
	225/70R16	103	T		9.0	6½J	228	722	300	BSW	D	C	71dB	B
	235/70R16	106	T		9.0	7J	240	736	300	BSW	C	C	71dB	B
	245/70R16	111	T	XL	9.0	7J	248	750	340	BSW	C	C	72dB	B
	255/70R16	111	T		9.0	7½J	260	764	300	BSW	C	C	72dB	B
	265/70R16	112	S		9.0	8J	272	778	300	BSW	C	C	72dB	B
17"	215/60R17	96	H		9.0	6½J	221	690	300	BSW	D	C	71dB	B
	225/65R17	102	S		9.2	6½J	228	724	300	BSW	D	C	71dB	B
	235/65R17	104	S		9.0	7J	240	738	300	BSW	D	C	71dB	B
	245/65R17	107	S		9.0	7J	248	750	300	BSW	D	C	71dB	B
	265/65R17	112	S		9.0	8J	272	776	300	BSW	C	C	72dB	B
	235/60R18	107	H	XL	9.0	7J	240	739	340	BSW	D	C	72dB	B

DYNACOMFORT
E5380



H Rated
65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
15"	225/70R15	100	H		9.0	6½J	228	697	300	BSW	D	C	71dB	B
	235/70R15	102	H		8.2	7J	240	711	300	BSW	D	C	71dB	B
17"	255/65R17	110	H		8.2	7½J	260	764	300	BSW	D	C	72dB	B
	265/70R17	115	H		8.2	8J	272	804	300	BSW	D	C	72dB	B

SUMMER TYRES

All Terrain



ES89



R/S Rated
70/75/85 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
15"	31*10.50R15LT	109	R		13	8½J	268	775	350	OWL	D	B	72dB	B
	LT215/75R15	100/97	R		12.0	6J	216	703	350	OWL	D	B	72dB	B
	LT235/75R15	104/101	R		13	6½J	235	733	350	OWL	D	B	72dB	B
	LT235/75R15	104/101	R		13	6½J	235	733	350	BSW	D	B	72dB	B
16"	LT215/85R16	115/112	R		12.5	6J	216	772	550	OWL	D	B	72dB	B
	LT225/75R16	115/112	R		13	6J	223	744	550	OWL	D	B	72dB	B
	LT225/75R16	115/112	R		13	6J	223	744	550	BSW	D	B	72dB	B
	LT235/85R16	120/116	R		13	6½J	235	806	550	OWL	C	B	72dB	B
	LT245/75R16	120/116	S		13.0	7J	248	774	550	OWL	C	B	72dB	B
	LT265/70R16	110/107	R		13	8J	272	778	350	OWL	D	D	72dB	B

DYNATERRAIN
E592



S/T/H/V Rated
60/65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
16"	275/70R16	114	T		9.5	8J	279	792	300	OWL			POR	
	265/70R17	115	S		9.5	8J	272	804	300	OWL			POR	
17"	275/65R17	115	T		9.5	8J	279	790	300	OWL			POR	
	285/65R17	116	T		9.5	8½J	292	802	300	OWL			POR	
18"	285/60R18	116	H		9.5	8½J	292	799	300	OWL			POR	

Mud Terrain



DYNA WILD
ES 91




Q Rated
75/85 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
15"	31×10.50R15LT	109	Q		15.3	8½J	268	781	350	OWL			POR	Y
	33×12.50R15LT	108	Q		15.3	10J	318	832	250	OWL			POR	Y
	35×12.50R15LT	113	Q		15.3	10J	318	883	250	OWL			POR	Y
16"	LT235/85R16	120/116	Q		15.3	6½J	235	812	550	OWL			POR	Y
	LT245/75R16	120/116	Q		15.3	7J	248	780	550	OWL			POR	Y
	LT265/75R16	123/120	Q		15.3	7½J	267	810	550	OWL			POR	Y
20"	33×12.50R20LT	114	Q		15.3	10J	318	832	450	OWL			POR	Y



DYNAMASTER
EV516




R/T Rated
60/65/70/75 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
14"	165/70R14C	89/87	T		8	5J	170	588	375	BSW	D	B	72dB	B
	175/65R14C	90/88	T		8	5J	177	584	375	BSW	D	B	72dB	B
15"	195R15C	106/104	R		9.0	5½J	198	690	450	BSW	C	B	72dB	B
	215/70R15C	109/107	R		9.0	6½J	221	683	450	BSW	C	B	72dB	B
	225/70R15C	112/110	R		10.0	6½J	228	697	450	BSW	C	B	72dB	B
16"	185/75R16C	104/102	R		9.0	5J	184	684	475	BSW	D	B	72dB	B
	205/65R16C	107/105	T		9.0	6J	209	672	475	BSW	C	B	72dB	B
	215/60R16C	108/106	T		9.0	6½J	221	664	475	BSW	C	B	72dB	B
	215/65R16C	109/107	R		9.2	6½J	221	686	475	BSW	C	B	72dB	B
	215/75R16C	113/111	R		10.5	6J	216	728	475	BSW	C	B	72dB	B
	225/65R16C	112/110	R		9.0	6½J	228	698	475	BSW	C	B	72dB	B
	235/65R16C	115/113	T		9.0	7J	240	712	475	BSW	C	B	72dB	B
	235/65R16C	121/119	R		9.0	7J	240	712	475	BSW	C	B	72dB	B

ES88



P/Q/R/S/T Rated
60/65/70/75 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
12"	145R12C	80/78	P		8.0	4.00B	145	537	350	BSW	D	B	72dB	B
	145R12C	86/84	P		8.0	4.00B	145	537	450	BSW	D	B	72dB	B
	155R12C	88/86	P		8.0	4.50B	157	550	450	BSW	D	B	72dB	B
13"	155R13C	85/83	Q		8	4.50B	157	578	350	BSW	D	B	72dB	B
	165/70R13C	88/86	Q		8	5.00B	170	562	375	BSW	D	B	72dB	B
	165R13C	94/93	S		7.6	4.50B	167	596	450	BSW	D	B	72dB	B
	175R13C	97/95	S		8	5.00B	177	610	450	BSW	D	B	72dB	B
14"	175/70R14C	95/93	Q		8	5J	177	602	375	BSW	D	B	72dB	B
	175R14C	99/98	Q		9.0	5J	178	634	450	BSW	D	B	72dB	B
	185R14C	102/100	Q		9.0	5½J	188	650	450	BSW	D	B	72dB	B
	195R14C	106/104	Q		9.0	5½J	198	666	450	BSW	C	B	72dB	B
	205R14C	109/107	R		9.0	6J	208	686	450	BSW	C	B	72dB	B
	185R15C	103/102	R		9.4	5½J	188	674	450	BSW	D	B	72dB	B
15"	195/70R15C	104/102	R		10.0	6J	201	655	450	BSW	D	B	72dB	B
	195R15C	106/104	R		9.0	5½J	198	690	450	BSW	C	B	72dB	B
	205/70R15C	106/104	R		9.0	6J	209	669	450	BSW	C	B	72dB	B
	215/70R15C	109/107	S		10.0	6½J	221	683	450	BSW	C	B	72dB	B
	225/70R15C	112/110	R		10.0	6½J	228	697	450	BSW	C	B	72dB	B
	195/60R16C	99/97	T		9.0	6J	201	640	375	BSW	D	B	72dB	B
16"	195/65R16C	104/102	R		9.4	6J	201	660	475	BSW	C	B	72dB	B
	195/75R16C	107/105	R		10.0	5½J	196	698	475	BSW	C	B	72dB	B
	205/65R16C	107/105	R		9.0	6J	209	672	475	BSW	C	B	72dB	B
	205/75R16C	110/108	R		9.0	5½J	203	714	475	BSW	C	B	72dB	B
	215/60R16C	103/101	T		9.0	6½J	221	664	375	BSW	C	B	72dB	B
	215/65R16C	109/107	R		9.0	6½J	221	686	475	BSW	C	B	72dB	B
	215/70R16C	108/106	Q		9.0	6½J	221	708	375	BSW	C	B	72dB	B
	215/75R16C	116/114	R		10.5	6J	216	728	525	BSW	C	B	72dB	B
	225/65R16C	112/110	R		9.0	6½J	228	698	475	BSW	C	B	69dB	A
	225/75R16C	121/120	R		9.0	6J	223	744	575	BSW	C	B	72dB	B
	235/65R16C	121/119	R		9.0	7J	240	712	575	BSW	C	B	70dB	B

ALL SEASON TYRES



DYNACOMFORT
EA719



T/H/V/W Rated
45/50/55/60/65/70/80 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
13"	155/80R13	79	T		8.0	4.50B	157	578	300	BSW	E	B	71dB	B
	155/65R14	75	T		8.0	4½J	157	558	300	BSW	E	B	71dB	B
	165/60R14	79	T	XL	8	5J	170	554	340	BSW	D	B	71dB	B
14"	165/65R14	79	T		8	5J	170	570	300	BSW	E	B	71dB	B
	165/70R14	85	T	XL	8.5	5J	170	588	340	BSW	D	D	71dB	B
	175/65R14	82	T		8	5J	177	584	300	BSW	D	D	71dB	B
	175/70R14	88	T	XL	8	5J	177	602	340	BSW	D	B	71dB	B
	185/60R14	82	T		8.4	5½J	189	578	300	BSW	D	D	71dB	B
	185/65R14	86	T		8	5½J	189	596	300	BSW	D	D	71dB	B
	175/65R15	84	T		8	5J	177	609	300	BSW	E	B	71dB	B
15"	185/55R15	82	H		8	6J	194	585	300	BSW	E	B	71dB	B Y
	185/60R15	88	H	XL	8	5½J	189	603	300	BSW	D	D	71dB	B
	185/65R15	88	H		8	5½J	189	621	300	BSW	D	D	71dB	B
	195/50R15	82	V		8	6J	201	577	300	BSW	D	D	72dB	B Y
	195/55R15	85	H		8	6J	201	595	300	BSW	E	B	71dB	B Y
	195/60R15	88	H		8.4	6J	201	615	300	BSW	D	D	72dB	B
	195/65R15	91	H		8.7	6J	201	635	300	BSW	D	D	72dB	B
16"	205/65R15	94	H		8	6J	209	647	300	BSW	D	B	71dB	B
	195/55R16	91	V	XL	8	6J	201	620	300	BSW	C	D	72dB	B Y
	205/55R16	94	V	XL	8	6½J	214	632	300	BSW	D	D	72dB	B Y
	205/60R16	96	V	XL	8.2	6J	209	652	300	BSW	C	D	72dB	B Y
	215/60R16	95	H		8	6½J	221	664	300	BSW	D	B	71dB	B
17"	215/65R16	98	H		8	6½J	221	686	300	BSW	D	B	71dB	B
	215/60R17	100	V	XL	9.0	6½J	221	690	300	BSW	C	D	72dB	B Y
	225/45R17	94	V	XL	8.5	7½J	225	634	300	BSW	D	D	72dB	B Y
	225/50R17	98	W	XL	8.5	7J	233	658	340	BSW	C	D	72dB	B Y



DYNACOMFORT
EA721



T/H Rated
50/55/65 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
16"	215/55R16	97	H	XL	7.8	7 J	226	642	340	BSW	C	A	72dB	B Y
	205/50R17	93	H	XL	7.8	6½J	214	638	340	BSW	D	A	72dB	B Y
	205/55R17	95	H	XL	7.8	6½J	214	658	340	BSW	D	A	72dB	B Y
17"	215/50R17	95	H	XL	7.8	7 J	226	648	340	BSW	C	A	72dB	B Y
	225/65R17	106	T	XL	7.8	6½J	228	724	300	BSW	C	A	72dB	B Y
	235/55R17	103	H	XL	7.8	7½J	245	690	340	BSW	D	A	72dB	B Y
18"	225/55R18	102	H	XL	7.8	7 J	233	705	300	BSW	C	A	72dB	B Y

DYNAMASTER
EA720 VAN



T/H/Rated
60/65/70/75/ Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
14"	165/70R14C	89/87	T		8.5	5J	170	588	375	BSW	D	C	71dB	B
	175/65R14C	90/88	T		8.5	5J	177	584	375	BSW	D	C	71dB	B
	195/70R15C	104/102	T		9.5	6J	201	655	450	BSW	D	C	71dB	B
15"	205/65R15C	102/100	T		9.5	6J	209	647	375	BSW	D	C	71dB	B
	205/70R15C	106/104	T		9.5	6J	209	669	450	BSW	C	C	71dB	B
	215/70R15C	109/107	T		10.0	6½J	221	683	450	BSW	C	C	71dB	B
	225/70R15C	112/110	T		10.0	6½J	228	697	450	BSW	C	C	71dB	B
	195/60R16C	99/97	H		9.5	6J	201	640	375	BSW	D	C	71dB	B
16"	195/65R16C	104/102	T		9.5	6J	201	660	475	BSW	D	C	71dB	B
	195/75R16C	107/105	T		9.5	5½J	196	698	475	BSW	C	C	71dB	B
	205/65R16C	107/105	T		9.5	6J	209	672	475	BSW	C	C	71dB	B
	205/75R16C	110/108	T		9.5	5½J	203	714	475	BSW	C	C	71dB	B
	215/65R16C	109/107	T		9.5	6½J	221	686	475	BSW	C	C	71dB	B
	215/70R16C	108/106	T		10.0	6½J	221	708	375	BSW	C	C	71dB	B
	215/75R16C	113/111	T		10.0	6J	216	728	475	BSW	C	C	71dB	B
	225/65R16C	112/110	T		10.0	6½J	228	698	475	BSW	C	C	71dB	B
	235/65R16C	115/113	T		10.0	7J	240	712	475	BSW	C	C	71dB	B

WINTER TYRES



EW66



S/T/H/V Rated
35/40/45/50/55/60/65 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
15"	195/65R15	95	T	XL	9.2	6J	201	635	340	BSW	D	C	72dB	Y
	205/55R16	91	H		9.5	6 1/2J	214	632	300	BSW	D	C	72dB	Y
	215/55R16	97	H	XL	9.5	7J	226	642	340	BSW	D	C	72dB	Y
16"	215/60R16	99	H	XL	9.5	6 1/2J	221	664	340	BSW	D	C	72dB	Y
	215/65R16	98	H		9.5	6 1/2J	221	686	300	BSW	D	C	72dB	Y
	225/55R16	99	H	XL	9.5	7J	233	654	340	BSW	D	C	72dB	Y
17"	205/45R17	88	H	XL	9.5	7J	206	616	340	BSW	D	C	72dB	Y
	205/50R17	89	H		9.5	6½J	214	638	300	BSW	D	C	72dB	Y
	205/55R17	95	H	XL	9.5	6½J	214	658	340	BSW	D	C	72dB	Y
	215/45R17	87	H		9.5	7J	213	626	300	BSW	D	C	72dB	Y
	215/55R17	94	H		9.5	7J	226	668	300	BSW	D	C	72dB	Y
	225/45R17	91	H		9.5	7½J	225	634	300	BSW	D	C	72dB	Y
	225/50R17	98	H	XL	9.5	7J	233	658	340	BSW	D	C	72dB	Y
18"	225/55R17	97	H		9.5	7J	233	680	300	BSW	D	C	72dB	Y
	225/65R17	102	S		9.5	6½J	228	724	300	BSW	D	C	72dB	Y
	235/45R17	94	H		9.5	8J	236	644	300	BSW	D	C	72dB	Y
	235/55R17	99	H		9.5	7½J	245	690	300	BSW	D	C	72dB	Y
	235/65R17	104	S		9.5	7J	240	738	300	BSW	D	C	72dB	Y
	265/65R17	112	S		9.5	8J	272	776	300	BSW	C	C	72dB	Y
	215/55R18	99	H	XL	9.5	7J	226	693	340	BSW	D	C	72dB	Y
19"	225/40R18	92	H	XL	9.5	8J	230	637	340	BSW	D	C	72dB	Y
	235/40R18	95	V	XL	8.8	8½J	241	645	340	BSW	D	C	72dB	Y
	235/45R18	98	H	XL	9.5	8J	236	669	340	BSW	D	C	72dB	Y
	235/55R18	104	H	XL	9.5	7½J	245	715	340	BSW	D	C	72dB	Y
	245/40R18	97	H	XL	9.5	8½J	248	653	340	BSW	D	C	72dB	Y
	245/45R18	100	H	XL	9.5	8J	243	677	340	BSW	D	C	72dB	Y
	255/55R18	109	H	XL	9.5	8J	265	737	340	BSW	D	D	72dB	Y
20"	225/40R19	93	V	XL	8.8	8J	230	663	340	BSW	D	C	72dB	Y
	245/40R19	98	H	XL	9.5	8½J	248	679	340	BSW	D	C	72dB	Y
	245/55R19	103	V		9.5	7½J	253	753	300	BSW	D	C	72dB	Y
	255/35R19	96	H	XL	9.5	9J	260	661	340	BSW	D	C	72dB	Y
	255/40R19	100	V	XL	9.5	9J	260	687	340	BSW	D	C	72dB	Y
	255/50R19	107	H	XL	9.5	8J	265	739	340	BSW	C	C	73dB	Y

EW62



T/H Rated
50/55/60/65/70 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
13"	155/65R13	73	T		8.5	4.50B	157	532	300	BSW	E	D	71dB	B
	155/70R13	75	T		8.5	4.50B	157	548	300	BSW	E	D	71dB	B
	175/70R13	82	T		8.5	5.00B	177	576	300	BSW	E	D	71dB	B
14"	165/65R14	79	T		8.5	5J	170	570	300	BSW	E	D	71dB	B
	175/65R14	82	H		8.7	5J	177	584	300	BSW	E	D	71dB	B
	175/70R14	88	T	XL	8.5	5J	177	602	340	BSW	E	D	71dB	B
	185/60R14	82	T		8.5	5½J	189	578	300	BSW	E	D	71dB	B
	185/65R14	86	T		8.7	5½J	189	596	300	BSW	D	D	71dB	B
15"	185/70R14	88	H		8.7	5½J	189	616	300	BSW	D	D	71dB	B
	195/70R14	91	H		8.7	6J	201	630	300	BSW	D	C	71dB	B
	175/65R15	84	H		8.7	5J	177	609	300	BSW	D	D	71dB	B
	185/55R15	86	H	XL	8.5	6J	194	585	340	BSW	E	D	71dB	B
	185/60R15	88	H	XL	8.5	5½J	189	603	340	BSW	E	D	71dB	B
	185/65R15	88	T		8.7	5½J	189	621	300	BSW	D	D	71dB	B
	185/65R15	92	T	XL	8.7	5½J	189	621	340	BSW	D	D	71dB	B
	195/55R15	85	H		8.5	6J	201	595	300	BSW	D	C	71dB	B
	195/60R15	88	T		8.5	6J	201	615	300	BSW	D	C	71dB	B
	195/65R15	91	T		8.7	6J	201	635	300	BSW	D	C	71dB	B
16"	205/60R15	91	H		8.7	6J	209	627	300	BSW	D	C	71dB	B
	205/65R15	94	H		8.5	6J	209	647	300	BSW	D	C	71dB	B
	215/65R15	96	H		8.5	6½J	221	661	300	BSW	D	C	72dB	B
	195/55R16	87	H		8.5	6J	201	620	300	BSW	D	C	71dB	B
	205/50R16	87	H		8.7	6½J	214	612	300	BSW	D	C	71dB	B
	205/55R16	91	H		8.5	6½J	214	632	300	BSW	D	C	71dB	B
	205/55R16	94	H	XL	8.5	6½J	214	632	340	BSW	D	C	71dB	B
	205/60R16	96	H	XL	8.7	6J	209	652	340	BSW	D	D	72dB	B
	205/65R16	95	H		8.8	6J	209	672	300	BSW	D	C	71dB	B
	215/60R16	99	H	XL	8.7	6½J	221	664	340	BSW	D	D	72dB	B
17"	215/65R16	98	H		8.8	6½J	221	686	300	BSW	D	C	72dB	B
	225/60R16	98	H		8.7	6½J	228	676	300	BSW	D	C	72dB	B
	245/70R16	107	T		8.7	7J	248	750	300	BSW	D	D	72dB	B

WINTER TYRES



IceTour
i5



T/H/S/Q/R Rated
40/45/50/55/60/65/70/75/80 Series



INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
13"	155/80R13	79	T		10.0	4.50B	157	578	300	BSW	E	D	71dB	B
	175/70R13	82	T		10.0	5.00B	177	576	300	BSW	E	D	71dB	B
14"	175/65R14	82	T		10.0	5J	177	584	300	BSW	E	D	71dB	B
	175/70R14	84	T		10.0	5J	177	602	300	BSW	E	D	71dB	B
	185/60R14	82	T		10.0	5½J	189	578	300	BSW	E	D	71dB	B
	185/65R14	86	T		10.0	5½J	189	596	300	BSW	D	D	71dB	B
	185/70R14	88	T		10.0	5½J	189	616	300	BSW	D	D	71dB	B
	175/65R15	84	T		10.0	5J	177	609	300	BSW	E	D	71dB	B
15"	185/55R15	82	T		10.0	6J	194	585	300	BSW	E	D	71dB	B
	185/60R15	84	T		10.0	5½J	189	603	300	BSW	E	D	71dB	B
	185/65R15	88	T		10.0	5½J	189	621	300	BSW	D	D	71dB	B
	195/60R15	88	T		10.0	6J	201	615	300	BSW	D	D	72dB	B
	195/65R15	91	T		10.0	6J	201	635	300	BSW	D	D	72dB	B
	205/65R15	94	T		10.0	6J	209	647	300	BSW	D	D	72dB	B
	205/70R15	96	T		10.0	6J	209	669	300	BSW	D	D	72dB	B
	215/70R15	98	T		10.0	6½J	221	683	300	BSW	D	D	72dB	B
	235/75R15	105	S		11.0	6½J	235	733	300	BSW	D	D	72dB	B
	205/55R16	91	T		10.0	6½J	214	632	300	BSW	D	D	72dB	B
16"	205/60R16	92	T		10.0	6J	209	652	300	BSW	D	D	72dB	B
	205/65R16	95	T		10.0	6J	209	672	300	BSW	D	D	72dB	B
	215/55R16	97	H	XL	10.0	7J	226	642	340	BSW	D	D	72dB	B
	215/60R16	95	T		10.0	6½J	221	664	300	BSW	D	D	72dB	B
	215/65R16	98	T		10.0	6½J	221	686	300	BSW	D	D	72dB	B
	215/70R16	100	S		11.0	6½J	221	708	300	BSW	D	D	72dB	B
	225/60R16	98	T		10.0	6½J	228	676	300	BSW	D	D	72dB	B
	225/65R16	100	T		10.0	6½J	228	698	300	BSW	D	D	72dB	B
	225/70R16	103	S		11.0	6½J	228	722	300	BSW	D	D	72dB	B
	235/70R16	106	S		11.0	7J	240	736	300	BSW	D	D	72dB	B
	245/70R16	107	S		11.0	7J	248	750	300	BSW	D	D	72dB	B
	245/75R16	111	S		11.0	7J	248	774	300	BSW	D	D	72dB	B
	LT225/75R16	115/112	Q		13.5	6J	223	744	550	BSW	D	C	73dB	B
	LT245/75R16	120/116	Q		13.5	7J	248	774	550	BSW	D	C	73dB	B

INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
17"	215/45R17	91	T	XL	10.0	7J	213	626	340	BSW	D	D	72dB	B Y
	215/50R17	95	T	XL	10.0	7J	226	648	340	BSW	D	D	72dB	B Y
	215/55R17	94	T		11.0	7J	226	668	300	BSW	D	D	72dB	B
	215/60R17	96	T		10.0	6½J	221	690	300	BSW	D	D	72dB	B
	215/65R17	99	T		11.0	6½J	221	712	300	BSW	D	D	72dB	B
	225/45R17	94	H	XL	10.0	7½J	225	634	340	BSW	D	D	72dB	B Y
	225/50R17	98	H	XL	10.0	7J	233	658	340	BSW	D	D	72dB	B Y
	225/55R17	97	T		11.0	7J	233	680	300	BSW	D	D	72dB	B
	225/60R17	99	T		10.0	6½J	228	702	300	BSW	D	D	72dB	B
	225/65R17	102	S		11.0	6½J	228	724	300	BSW	D	D	72dB	B
	235/55R17	99	H		10.0	7½J	245	690	300	BSW	D	D	72dB	B Y
	235/60R17	102	H		10.0	7J	240	714	300	BSW	D	D	72dB	B
	235/65R17	104	S		11.0	7J	240	738	300	BSW	D	D	72dB	B
	245/65R17	107	S		11.0	7J	248	750	300	BSW	D	D	72dB	B
18"	245/70R17	110	S		11.5	7J	248	776	300	BSW	D	D	73dB	B
	265/65R17	112	T		11.2	8J	272	776	300	BSW	D	D	73dB	B
	265/70R17	115	S		11.0	8J	272	804	300	BSW	D	D	73dB	B
	LT245/70R17	119/116	Q		13.5	7J	248	776	550	BSW	D	C	72dB	B
	LT245/75R17	121/118	R		13.5	7J	248	806	550	BSW	D	D	73dB	B
	LT265/70R17	121/118	Q		13.5	8J	272	804	550	BSW	D	C	73dB	B
	225/40R18	92	H	XL	10.0	8J	230	637	340	BSW	D	D	72dB	B Y
	225/45R18	95	T	XL	10.0	7½J	225	659	340	BSW	D	D	72dB	B Y
	225/55R18	98	T		10.0	7J	233	705	300	BSW	D	D	72dB	B Y
	225/60R18	100	T		10.0	6½J	228	727	300	BSW	D	D	72dB	B Y
	235/55R18	100	H		11.0	7½J	245	715	300	BSW	D	D	72dB	B
	235/60R18	107	T	XL	10.0	7J	240	739	340	BSW	D	D	72dB	B Y
	235/65R18	106	T		11.2	7J	240	763	300	BSW	D	D	72dB	B Y
	245/60R18	105	T		11.2	7J	248	751	300	BSW	D	D	72dB	B Y
19"	255/55R18	105	H		10.0	8J	265	737	300	BSW	D	D	72dB	B Y
	265/60R18	110	T		11.2	8J	272	775	300	BSW	D	D	73dB	B Y
	275/65R18	116	S		11.2	8J	279	815	300	BSW	D	D	73dB	B Y
	235/55R19	101	H		10.0	7½J	245	741	300	BSW	D	D	72dB	B Y
20"	255/50R19	107	H		10.0	8J	265	739	340	BSW	D	D	72dB	B Y
	275/40R20	106	H	XL	11.2	9½J	278	728	340	BSW	D	D	73dB	B Y
	275/55R20	117	S	XL	11.5	8½J	284	810	340	BSW	D	D	73dB	B Y

WINTER TYRES



WINTERPRO
EW616




R/S/T Rated
60/65/70/75 Series




INCH	SIZE	LI	SR	XL	TREAD DEPTH	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	PRESSURE	SIDE-WALL				RIM PROTECTOR
					(mm)	(inch)	(mm)	(inch)	(kpa)					
14"	185R14C	102/100	R		9.6	5½J	188	650	450	BSW	D	D	71dB	B
	195R14C	106/104	R		10.0	5½J	198	666	450	BSW	D	D	71dB	B
15"	195/70R15C	104/102	S		10.0	6J	201	655	450	BSW	D	D	71dB	B
	215/70R15C	113/111	S		10.0	6½J	221	683	525	BSW	C	D	71dB	B
	225/70R15C	112/110	S		10.0	6½J	228	697	450	BSW	C	D	71dB	B
16"	185/75R16C	104/102	R		9.6	5J	184	684	475	BSW	D	D	71dB	B
	195/60R16C	99/97	T		10.2	6J	201	640	375	BSW	C	D	71dB	B
	195/65R16C	104/102	T		10.0	6J	201	660	475	BSW	D	D	71dB	B
	195/75R16C	107/105	R		10.0	5½J	196	698	475	BSW	D	D	71dB	B
	205/65R16C	107/105	T		10.0	6J	209	672	475	BSW	D	D	71dB	B
	205/75R16C	113/111	R		10.0	5½J	203	714	525	BSW	C	D	71dB	B
	215/60R16C	108/106	T		10.0	6½J	221	664	475	BSW	D	D	71dB	B
	215/65R16C	109/107	T		10.0	6½J	221	686	475	BSW	D	D	71dB	B
16"	215/75R16C	116/114	R		10.0	6J	216	728	525	BSW	C	D	71dB	B
	225/65R16C	112/110	T		10.0	6½J	228	698	475	BSW	C	D	71dB	B
	225/75R16C	118/116	R		10.0	6J	223	744	525	BSW	C	D	71dB	B
	235/65R16C	115/113	R		10.2	7J	240	712	575	BSW	C	D	71dB	B

READING YOUR TYRES

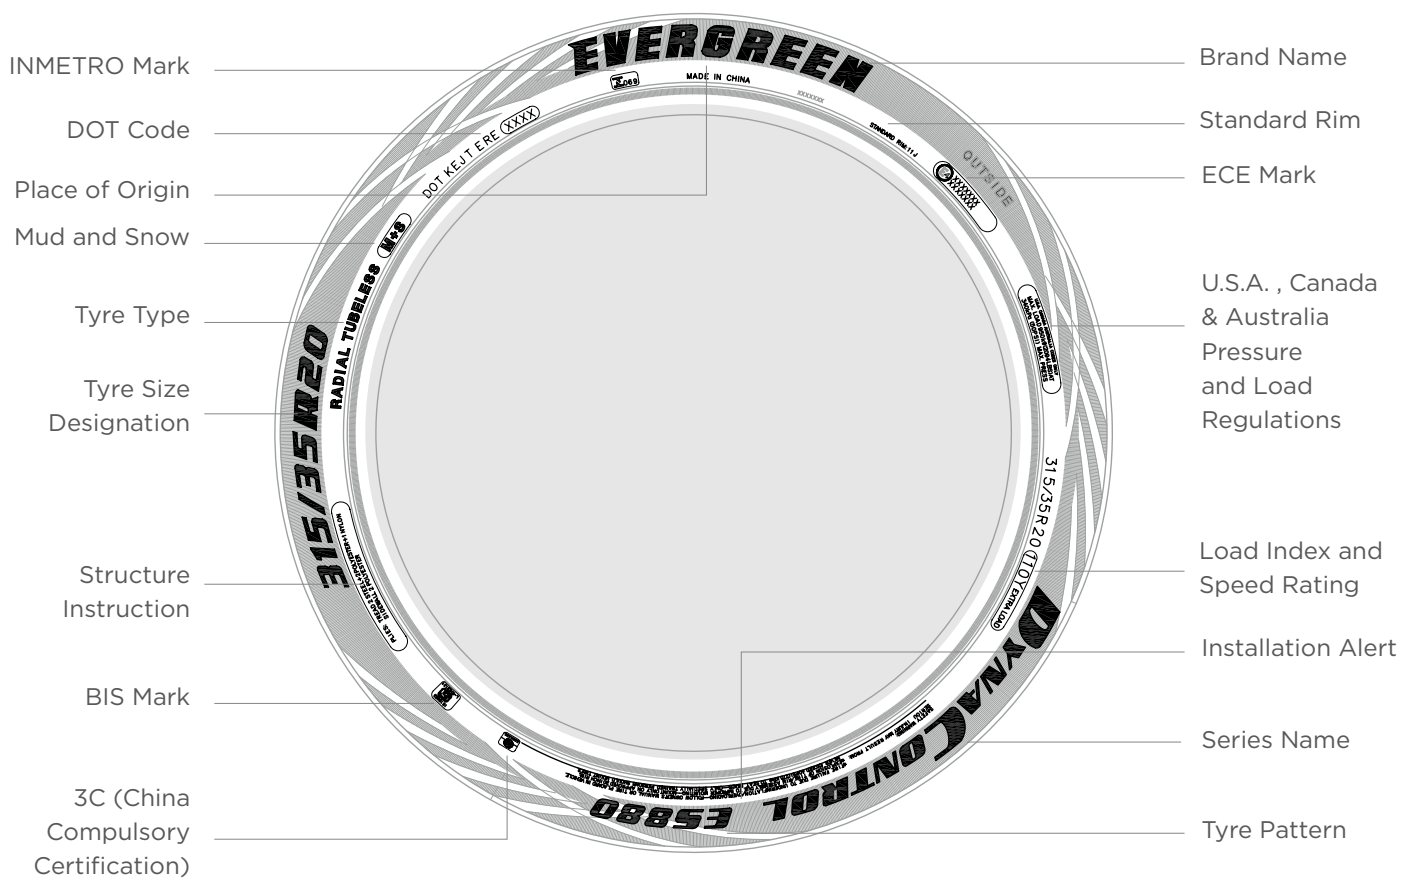

TYRE SIZE: a combination of alphabetic and numeric characters that indicate the nominal dimensions of a tyre.

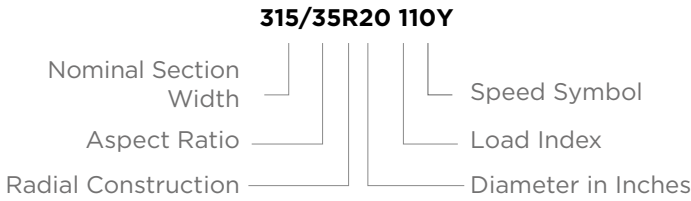

OTHER MARKINGS

- ZR** Indicates the tyres having a maximum speed capability above 240km/h.
- LT** Indicates the tyres are intended for light truck vehicles.
- XL** Indicates the tyres can carry more load as the maximum inflation pressure and load are greater than a standard load version.

SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tires that are properly inflated and loaded within their assigned load index.

Speed Rating	L	N	P	Q	R	S	T	U	H	V	W	Y	ZR
Max. Kph. (kilometer/hour)	120	140	150	160	170	180	190	200	210	240	270	300	≥240

LOAD INDEX

The load index is the maximum load-carrying of a tyre under a specific condition.

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
50	190	420	70	335	740	90	600	1320	110	1060	2340	130	1900	4180
51	195	430	71	345	760	91	615	1360	111	1090	2400	131	1950	4300
52	200	440	72	355	785	92	630	1390	112	1120	2470	132	2000	4400
53	206	455	73	365	805	93	650	1430	113	1150	2540	133	2060	4540
54	212	465	74	375	825	94	670	1480	114	1180	2600	134	2120	4680
55	218	480	75	387	855	95	690	1520	115	1215	2680	135	2180	4800
56	224	495	76	400	880	96	710	1570	116	1250	2760	136	2240	4940
57	230	505	77	412	910	97	730	1610	117	1285	2830	137	2300	5080
58	236	520	78	425	935	98	750	1650	118	1320	2910	138	2360	5200
59	243	535	79	437	965	99	775	1710	119	1360	3000	139	2430	5360
60	250	550	80	450	990	100	800	1760	120	1400	3080	140	2500	5520
61	257	565	81	462	1020	101	825	1820	121	1450	3200	141	2575	5680
62	265	585	82	475	1050	102	850	1870	122	1500	3300	142	2650	5840
63	272	600	83	487	1070	103	875	1930	123	1550	3420	143	2725	6000
64	280	615	84	500	1100	104	900	1980	124	1600	3520	144	2800	6150
65	290	640	85	515	1140	105	925	2040	125	1650	3640	145	2900	6400
66	300	660	86	530	1170	106	950	2090	126	1700	3740	146	3000	6600
67	307	675	87	545	1200	107	975	2150	127	1750	3860	147	3075	6800
68	315	695	88	560	1230	108	1000	2200	128	1800	3960	148	3150	6950
69	325	715	89	580	1280	109	1030	2270	129	1850	4080	149	3250	7150

EVERGREEN TIRE

Add: Building No. 5, Lane 388 Daduhe Road,
Shanghai 200062, China

Tel: (+86) (21) 6295 5670

E-mail: evergreentyre@evergreentyre.com

www.evergreentyre.com

Version 3.10.1 EU